

COMPACT COOL®

COMPACT COOL COOLING UNIT
MANUFACTURERS (PTY) LTD

Reg. No. 197600414707

BS EN Iso 9001:2000 CERTIFIED
MEMBER OF PROUDLY SOUTH AFRICA



CATALOGUE



Certificate no: FM 77963

60 - 3rd Street Booyens Reserve
P.O. Box 1697 Southdale 2135
Johannesburg

Tel: 27 (011) 835-1131/2/3/50

Fax: 27 (011) 835-2386

E-mail: sales@compactcool.com

www.compactcool.com





COMPACT COOL COOLING UNIT
 MANUFACTURERS (PTY) LTD
 Reg. No. 197600414707
 BS EN Iso 9001:2000 CERTIFIED
 MEMBER OF PROUDLY SOUTH AFRICA



Compact Cool Cooling Unit Manufacturers (Pty) Ltd was established in 1976 and operates from its own premises in Johannesburg.

Our staff are specialized in there fields and strive to always provide our customers with the same quality product and service as in the past.



The company designs, manufacturers and services industrial and laboratory cooling equipment for air and water cooling.



Our standard product range includes

- Water chillers (air cooled, and water cooled)
- Ice banks
- Air handlers
- Air conditioning units (Clip-on)
- Chill boxes



Certificate no: FM 77963

BS EN ISO 9001:2000 certified and a member of Proudly South Africa campaign.






COMPACT COOL COOLING UNIT
 MANUFACTURERS (PTY) LTD.
 Reg. No: 197600414707
 60 - 3rd STREET, BOOYSENS RESERVE 2091
 P.O. BOX 1697, SOUTHDALE 2135, JOHANNESBURG
 Tel: 27 (011) 835-1131/2/3/ Fax: 27 (011) 835-2386
 BS EN Iso 9001:2000
 e-mail: sales@compactcool.com
 website: www.compactcool.com
 BS EN Iso 9001:2000 CERTIFIED
 MEMBER OF PROUDLY SOUTH AFRICA

WATER CHILLERS Type TC




TC 90 / 330

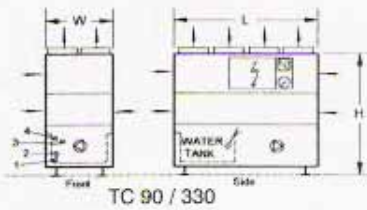

TC 90 / 330




TC 1 / 3




TC 1 / 3



TC 10 / 75



TC 5 / 7

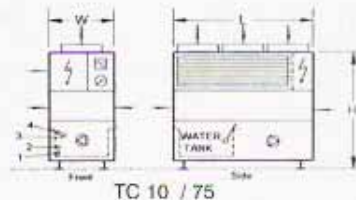

TC 10 / 75



TC 5 / 7

- Air Flow
- ⊗ Water Pump
- ⊠ Temperature Controller/Display
- ⊙ Pressure Gauge
- ⊡ Control Panel
- 1 Return Water
- 2 Supply Water
- 3 Tank Over Flow
- 4 Make Up Water



Certificate no: FM 77963



(Air Cooled Tank Chillers)

TYPICAL DIMENSIONS AND SPECIFICATIONS

(SUBJECT TO ALTERATION WITHOUT NOTICE)

Model	Cooling capacity at 32 °C ambient & water leaving °C			Condenser fan(s)	Compressor(s) power input max.	Tank volume	Water flow at 250 kPa pump head	Standard pump	Current max.	Dimensions width x length x height	Mass approx		Water connections tank		
	5	10	15								machine	operating	In Out	Over-flow	Make-up
TC	kW			No. x kW-Ø mm	No. x kW	Litre	m³/h	kW	A	mm	kg		mm NB		
1	1	1.1	1.2	1x0.11-300	1.0	40	0.2	0.3	7	220V	500 x 500 x 900	70	100	15	N/A
2	2	2.3	2.6	1x0.11-300	1.5	40	0.4	0.3	9		500 x 500 x 900	80	110	15	
3	3	3.5	4	1x0.24-350	2.1	100	0.6	0.33	12		640 x 640 x 1460	110	190	25	
5	5	6	7	1x0.37-400	2.6		1	0.37	9			140	220		
7	7	8	9.5	1x0.37-400	3.4		1.4	0.35	10			150	230		
10	10	12	13	1x0.64-500	4.4		2	0.75	13			500	800		
12	12	14	15	1x0.64-500	7.2	2.4	16		790 x 1480 x 1970		530	830			
15	15	19	22	1x0.55-670	8.2	3.2	19				550	850			
20	20	23	27	1x0.55-670	10	4	24				600	900			
25	25	29	31	2x0.64-500	11.5	5	1.1	29			650	950			
30	30	35	38	2x0.55-670	15	500	6	1.5	39	790 x 2720 x 1970	800	1300	50	25	15
40	40	48	54	3x0.55-670	2 x 10		8.3	1.5	50		900	1400			
50	50	58	62	3x0.55-670	2 x 11.5		10	2.2	56		950	1450			
60	60	70	76	3x0.55-670	2 x 15	950	12	2.2	75	380V	1280 x 2720 x 1970	1100	2000	65	
75	75	87	93	3x0.55-670	3 x 11.5	950	15	3	79		1280 x 2720 x 1970	1150	2050		
90	90	105	114	4x0.55-670	3 x 15	1200	18	3	110		1150 x 4150 x 2200	1800	3200		
120	120	140	152	5x0.55-670	4 x 15	1400	24	4	147		1300 x 4150 x 2600	2000	3400		
150	150	175	190	7x0.55-670	5 x 15	2000	30	4	183		1650 x 4150 x 2600	2500	4400		80
180	180	210	228	8x0.55-670	6 x 15	2500	36	4	218		2190 x 4150 x 2600	3050	5700		80
210	210	245	266	10x0.55-670	7 x 15	2500	42	5.5	256		2190 x 4150 x 2600	3200	6000		100
240	240	280	304	12x0.55-670	8 x 15	2900	48	7.5	292		2430 x 4150 x 2600	3700	6600		100
270	270	315	342	14x0.55-670	9 x 15	4000	54	7.5	325		2430 x 6300 x 2600	4100	8100		100
300	300	350	380	16x0.55-670	10 x 15	4000	60	7.5	358		2430 x 6300 x 2600	4300	8300		100
330	330	385	418	18x0.55-670	11 x 15	4000	66	9.2	395	2430 x 6300 x 2600	4500	8500	100		

COMPONENTS

- Reciprocating compressor(s).
- Condenser coil(s) with copper tubes mechanically expanded into aluminium fins.
- Axial impeller fan(s).
- Stainless steel grade 304 tank insulated with high density polyethylene foam.
- Direct expansion open type evaporator in copper.
- Close-coupled centrifugal pump.
- Electrical panel, incorporating:
 - mains isolator
 - circuit breaker(s)
 - contactor(s) and overload(s)
 - compressor anti-cycle timer (TC 7/330)
- On/off switch
- Signal lamps for main functions
- Electronic multi-stage (TC 40/330) thermostat for water temperature setting with lead/lag control of compressor sequence.
- Mechanical safety thermostat as protection against high or low water temperature.

- Tank water level safety switch
- Digital indication of tank (water leaving) temperature.
- Water pump pressure gauge.
- Compressor hour meters (TC 60/330)
- Make-up ball valve in water tank (TC 10/330).
- Suction strainer of pump.
- Isolating valves on water tank inlet and outlet (TC 10/330).
- Low ambient control by condenser fan speed control (TC 10/25) and cycling of fans (TC 30/330).
- Adjustable feet (TC 1/75).

INSTALLATION

- All units are assembled, internally wired and charged with refrigerant R22 at the factory.
- All that is required on site are water pipe connections and wiring to the mains power supply.


OPTIONS

- Flashing alarm light.
- Compressor hour meter (TC 1/50).
- Suction and discharge gauge for each compressor.
- Centrifugal type condenser fan(s) for duct application. Condenser heat may be diverted outside and during cold weather warm air can be diverted inside for space heating.
- Castors for easy manoeuvrability (TC 1/75).
- Single phase and low voltage protection.
- Stand-by pump plus pump selector switch.
- Automatic change-over of pump in the event of pump failure.
- Other pump models for different flow and pressure.
- Condenser with copper fins.
- Standard condenser with epoxy coated fins.
- Frame hot dip galvanized.
- Other refrigerant.
- Scroll compressor.

FEATURE

- Units are self-contained and compact for easy installation.
- Test run before delivery.
- Frame constructed from heavy gauge square tube. Galvanized covers removable for easy access to any part.
- Textured electrostatic powder coating finish.
- Large water tank to reduce stop/starts of compressor(s).
- Models TC 40/240 have multiple independent refrigeration systems.
- Units are designed for continuous operation at high ambient temperature.
- Because of the evaporator design the units can operate within a wide water temperature range.
- Manufactured in South Africa.

**COMPACT
COOL**

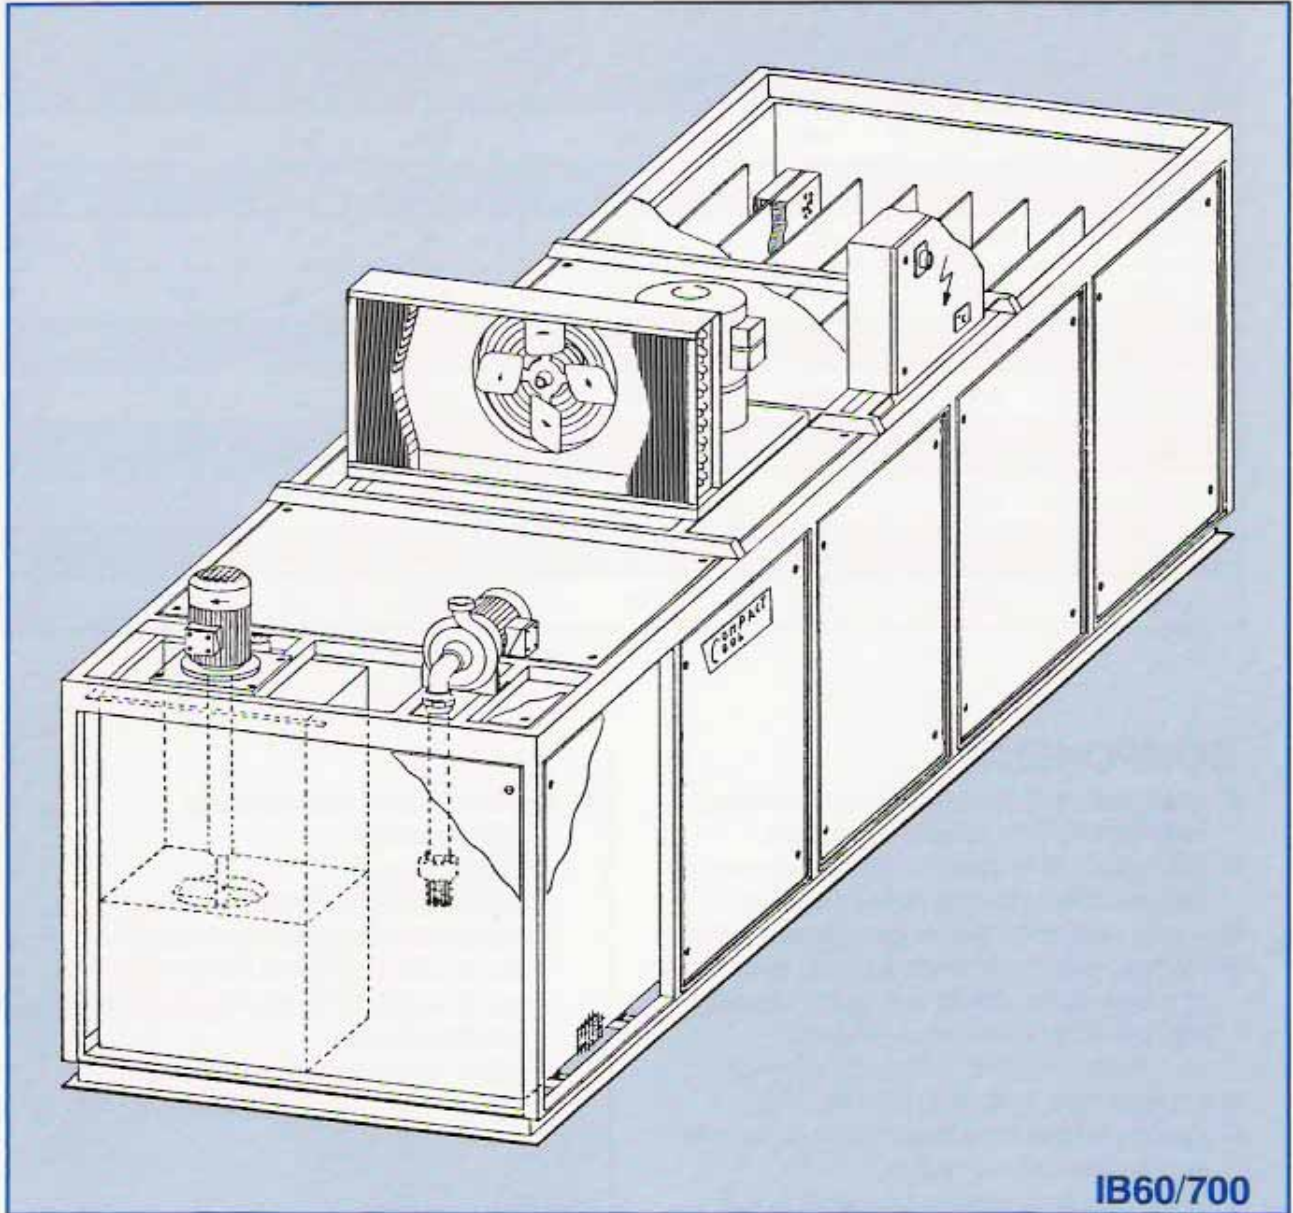

IB60/700

AIR COOLED ICE BUILDERS
ICE BANKS

TYPICAL DIMENSIONS AND SPECIFICATIONS
(SUBJECT TO ALTERATION WITHOUT NOTICE)

MODEL	ICE ACCUMULATION after ~ 17 h without load		COMPRESSOR(S) CAPACITY 32°C ambient	COOLING/ MELTING CAPACITY 1.5°C water	PUMP 200 kPa head		COMPRESSOR power input 1.5° water
	kg	≐ kW			flow	motor	
60	800	74	4,6	23	14	1,1	2
100	1300	121	7,6	38	7	1,1	3,6
120	1500	140	8,3	44	8	1,1	3,6
180	2200	205	12	67	12	1,1	5,6
300	3700	344	20	116	20	3	9,6
400	4800	446	27	145	25	3	1 x 5,6 1 x 7,3
500	5800	540	32	182	31	3	2 x 7,3
600	6900	642	39	212	36	4	2 x 9,6
700	8000	744	47	244	42	5,5	3 x 7,3

COMPONENTS

- Stainless steel grade 304 tank, insulated with high density polyethylene foam.
 - Mild steel frame constructed from heavy gauge tubing, plus galvanised covers.
 - Direct expansion galvanised freezer plates.
 - Refrigeration (condensing) unit(s) consisting of compressor, condenser coil of copper tubes mechanically expanded into aluminium fins, and refrigerant receiver.
 - Impeller type agitator(s) (IB 100/700).
 - Close-coupled centrifugal water pump with suction strainer/foot valve.
 - Ice thickness thermostat controlling ice build-up on freezer plates.
 - indication of ice water temperature.
- Electrical panel, incorporating:
 - mains isolator
 - circuit breaker
 - contractor(s) and overload relay(s)
 - compressor anti-cycling timer(s)
 - on/off switch for each refrigeration unit
 - on/off switch for pump/agitator(s) running simultaneously
 - signal lamps for main functions

AGITATOR(S)	CURRENT 380V max.	TANK VOLUME	DIMENSIONS inclusive refrigeration unit(s) length x width x height	MASS approx.		CONNECTIONS ISO R7	
				machine	operating	inlet	outlet
No. x kW	A	litre	mm	kg		mm	NB
-	10	1800	2770 x 770 x 2000	900	2700	50	32
2,2	19	4800	3805 x 1305 x 2200	1400	6200	50	32
2,2	20	4800		1500	6300	50	32
2,2	27	5900	5055 x 1305 x 2300	2000	7900	50	32
2,2	44	10.200	6310 x 1605 x 2500	2800	13000	50	40
2 x 2,2	58	12900	6310 x 1990 x 2500	3500	16400	2 x 50	40
2 x 2,2	72	17100	6310 x 2380 x 2500	4200	21300	2 x 50	40
4 x 2,2	90	18400	6310 x 2765 x 2500	5000	23400	2 x 50	40
4 x 2,2	100	21100	6310 x 3150 x 2500	5500	26.600	2 x 50	50

OPTIONS

- Flashing light in case of failure
- Compressor hour meter(s)
- Suction and discharge gauge with shut-off valves
- On/off switch with auto-position for remote control of pump/agitator(s)
- Stand-by pump and selector switch
- Automatic change-over in case of pump failure
- Multiple INDEPENDENT refrigeration units (IB100/300)
- Single phase and low voltage protection.

INSTALLATION

- All ice builders are assembled, internally wired and charged with refrigerant R22 at the factory.
- All that is required on site are water pipe connections and wiring to the mains power supply.

FEATURES

- Units are self-contained and compact for easy installation.
- Test run before delivery.
- Frame constructed from heavy gauge tube, galvanised covers removable.
- Paint finish : frame in industrial enamel and covers in polyester electrostatic powder coating.
- Models IB 400/700 have multiple INDEPENDENT refrigeration systems.
- Units are designed for continuous operation at high ambient temperature.
- The direct expansion system keeps the refrigerant charge small against plants which operate on a flooded system.
- The impeller type agitator avoids contamination, oxydization and warming-up of the ice water occuring when compressed air is used for agitation.
- All components manufactured or sourced in South Africa.

COMPACT COOL COOLING UNIT MANUFACTURERS (PTY) LTD.

Reg. No. 79/04147/07

58 - 2nd Street, Booyens Reserve, 2091
P.O. Box 1697, Southdale 2135, Johannesburg
Tel: (011) 835-1131/2/3. Telex: 487212 SA
Fax: (011) 835-2386




COMPACT COOL COOLING UNIT
 MANUFACTURERS (PTY) LTD.
 Reg. No: 197600414707
 60 - 3rd STREET, BOOYSENS RESERVE 2091
 P.O. BOX 1697, SOUTHDALE 2135, JOHANNESBURG
 Tel: 27 (011) 835-1131/2/3/ Fax: 27 (011) 835-2386
 BS EN Iso 9001:2000
 e-mail: sales@compactcool.com
 website: www.compactcool.com
 BS EN Iso 9001:2000 CERTIFIED
 MEMBER OF PROUDLY SOUTH AFRICA

WATER CHILLERS Type TKC AIR HANDLING TYPE TAH



Water Chillers and matching Chilled Water Air Handling Units.

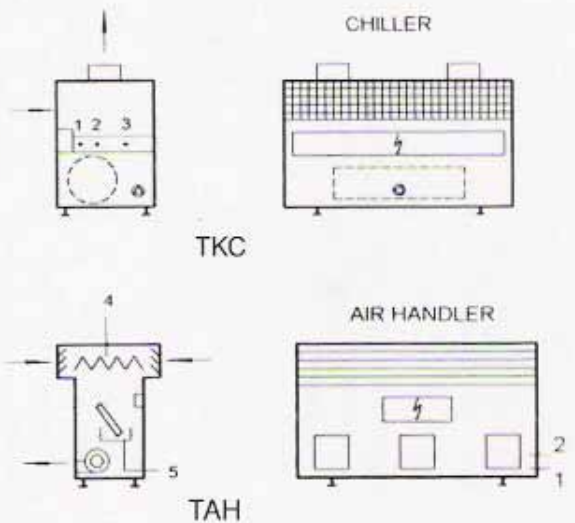

- = Air Flow
- ⊗ = Water Pump
- ⊠ = Control Panel
- 1 = Return Water
- 2 = Supply Water
- 3 = Make Up Water
- 4 = Filter
- 5 = Drain



GENERAL DESCRIPTION

COMPACT COOL TKC Water Chillers, and TAH Air Handling Units are suitable for indoor or outdoor applications. The Water Chillers are designed for very high ambient temperatures. All units have aluminium profile frames, and the covers are made of aluminium. The covers for the Air Handling Units are also insulated.



Certificate no: FM 77963



Telecommunication Cooling Systems

TYPICAL DIMENSIONS AND SPECIFICATIONS
(SUBJECT TO ALTERATION WITHOUT NOTICE)

WATER CHILLERS

Model	Cooling capacity at 30°C ambient & water leaving °C			Fan(s)	Condenser power input max.	Tank volume	Water flow at 150 kPa pump head	Standard pump	Current max.	Dimensions width x length x height	Mass approx.		Water connections tank		
	6	11	16								machine	operating	In Out	Over-flow	Make-up
TKC	kW			No. x kW-Ømm	kW	litre	m ³ /h	kW	A	mm	Kg		mm NB		
15800	11.5	13.5	15.8	1x0.64-500	4.4	200	2	0.37	13	920x1430x1850	200	400	32	32	20
33000	23	29	34	2x0.64-500	10	300	3.9	0.37	24	920x1950x2200	500	800	32	32	20
52000	35	43	52	3x0.64-500	15	400	5.8	0.75	38	920x2460x2200	850	1250	40	40	20

AIR HANDLING UNITS

Model	Cooling capacity chilled water at 16°C	Centrifugal fan(s)	Water flow	Current max.	Air Temp.	Dimensions width x length height
TAH	kW	No. x kW	m ³ /h	A	°C	mm
7500	7.5	1x1.1	2	6	adjustable	1200x700x2000
15000	15	2x1.1	4	12	adjustable	1200x1400x2000
22500	22.5	3x1.1	6	18	adjustable	1200x2100x2000

COMPONENTS (CAPACITY)

- Reciprocating compressor.
- Condenser coil(s) with tubes aluminium fins.
- Axial impeller fan(s)
- Fibreglass water tank.
- Evaporator Plate Heat Exchanger.
- Close-coupled centrifugal pump.
- Filter drier/liquid solenoid valve/ sight glass/expansion valve.
- Electrical panel, incorporating:
 - mains isolator
 - circuit breaker(s)
 - contractor(s) and overload(s)
 - compressor anti-cycle timer
 - Timer module anti-cycle timer & LP by-pass
 - Air Flow switch timer
- On/off switch
- Signal lamps for main functions (LED)
- Electronic thermostat with digital indication of temperature
- Mechanical safety thermostat as protection against low water temperature.
- Flow switch.
- Tank water level switch.
- Compressor hour meter.
- Isolating valves on water tank inlet and outlet.
- Low ambient control by condenser fan speed.
- Adjustable feet.

COMPONENTS AIR HANDLING UNIT

- Chilled water coil with copper tubes aluminium fins.
- Direct drive Fan(s) (bottom discharge)
- Electrical panel.
- Temperature controller.
- Temperature controlled 3 way water valve.
- Primary and secondary air filters.
- Air flow switch.
- Water flow switch.
- Dirty filter switch.
- Air damper (return/fresh air)
- Fan speed control manually adjustable

OPTIONS

- Single phase and low voltage protection.
- Other pump models for different flow and pressure.
- Condenser with copper fins.
- Suction and discharge gauge.
- Heating.

FEATURES

- Units are self-contained and compact for easy installation.
- Test run before delivery.
- Textured electrostatic powder coating finish.
- Large water tank to reduce stop/starts of chillers.
- Units are designed for continuous operation at high ambient temperature.
- Manufactured in South Africa.






COMPACT COOL COOLING UNIT
 MANUFACTURERS (PTY) LTD.
 Reg. No: 197600414707
 60 - 3rd STREET, BOOYSENS RESERVE 2091
 P.O. BOX 1697, SOUTHDALE 2135, JOHANNESBURG
 Tel: 27 (011) 835-1131/2/3/ Fax: 27 (011) 835-2386
 BS EN Iso 9001:2000
 e-mail: sales@compactcool.com
 website: www.compactcool.com
 BS EN Iso 9001:2000 CERTIFIED
 MEMBER OF PROUDLY SOUTH AFRICA

WATER CHILLERS Type SCW



GENERAL DESCRIPTION

COMPACT COOL SCW Water Chillers are designed for industrial process cooling or air-conditioning. In the evaporators and condensers, the shell is made of rolled carbon steel with high efficiency copper tubes.

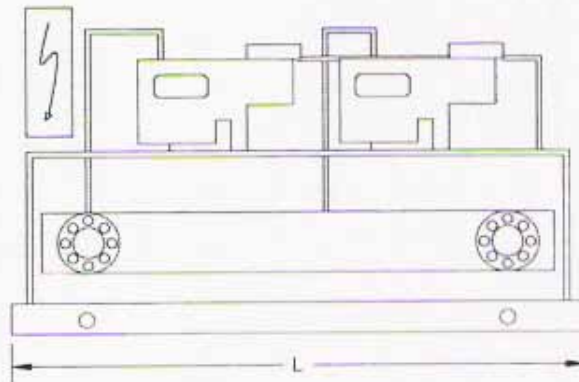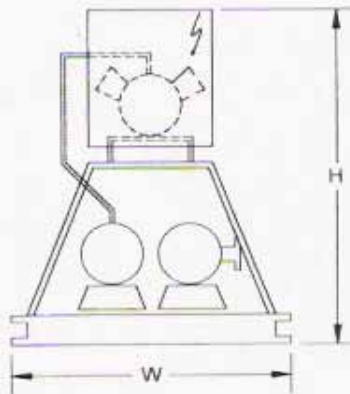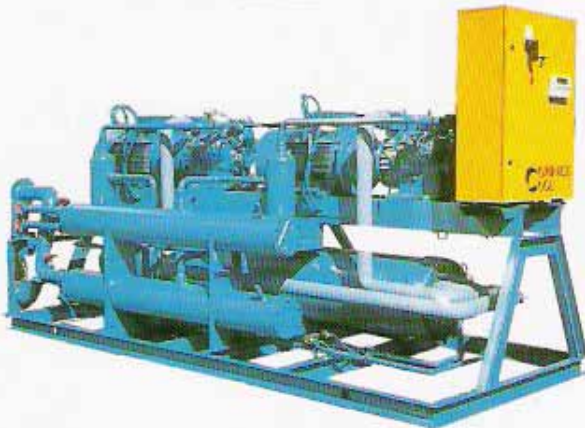

Certificate no: FM 77963



(Shell and Tube Chillers)

TYPICAL DIMENSIONS AND SPECIFICATIONS

(SUBJECT TO ALTERATION WITHOUT NOTICE)

Model	Cooling capacity based on 11°C to 6°C and tower water 29°C to 35°C	No. of compressors	Compressor power input max.	Tank volume	Current max.	Evaporator circuit	Dimensions width x length x height	Steps unloading	Weight dry	Water connections	
										Condenser	Evaporator
SCW			kW	m ³ /h	Amps		mm		kg	mm NB	
70	70	1	22	12	53	single	1100 x 2500 x 1650	2	750	50	80
105	105	1	30	18	78	single	1100 x 2500 x 1650	3	900	65	DN 100
140	140	2	2 x 22	24	106	double	1100 x 3000 x 1800	4	1050	2 x 50	DN 100
170	170	1	52	29	118	single	1100 x 3000 x 1800	3	1250	65	DN 100
210	210	2	2 x 30	36	156	double	1100 x 3500 x 1800	4	1600	2 x 65	DN 100
340	340	2	2 x 52	58	236	double	1200 x 3500 x 1800	6	2100	2 x 65	DN 125
510	510	3	3 x 52	87	354	triple	1200 x 3500 x 1800	6	3000	3 x 65	DN 125
680	680	4	4 x 52	116	464	2 x double	1200 x 3500 x 1800	8	4000	4 x 65	DN 125

COMPONENTS

- Semi-hermetic compressor(s).
- Shell and tube condenser(s).
- Shell and tube evaporator(s).
- Electrical panel, incorporating:
 - mains isolator
 - circuit breaker(s)
 - contactor(s) and overload(s)
 - part - wind start
 - anti-cycle start
 - on/off switch
 - signal lamp.
- Step controller.
- Freeze thermostat.
- Pressure gauges.
- HP switch unloading.
- LP switch unloading.
- Oil pressure switch.
- HP/LP switch.
- Compressor hour meter(s).
- Flow switch with timer.

INSTALLATION

- All units are assembled, internally wired and charged with refrigerant R22 at the factory.
- All that is required on site are water pipe connections, wiring to the mains power supply and interlocks for the evaporator and condenser pump.

OPTIONS

- Voltage monitor.
- Head pressure control.

FEATURES

- Units are self-contained and compact for easy installation.
- Test run before delivery.




COMPACT COOL COOLING UNIT
 MANUFACTURERS (PTY) LTD.
 Reg. No: 197600414707
 60 - 3rd STREET, BOOYSENS RESERVE 2091
 P.O. BOX 1697, SOUTHDALE 2135, JOHANNESBURG
 Tel: 27 (011) 835-1131/2/3/ Fax: 27 (011) 835-2386
 BS EN Iso 9001:2000
 e-mail: sales@compactcool.com
 website: www.compactcool.com
 BS EN Iso 9001:2000 CERTIFIED
 MEMBER OF PROUDLY SOUTH AFRICA

AIR CONDITIONING UNITS (CLIP-ON)



GENERAL DESCRIPTION

The Compact Cool Clip-on Package unit is suitable for indoor or outdoor applications. The frame is made of aluminium profile and the condenser unit can be removed to install remotely for different applications. One of the features of this unit is the low condensing pressure which enables it to perform in extreme ambient temperatures.

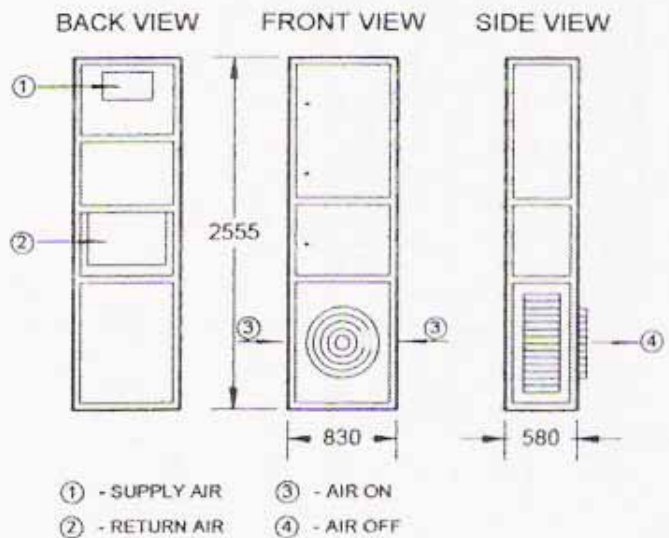

Certificate no: FM 77963



Telecommunication Cooling Systems

TYPICAL DIMENSIONS AND SPECIFICATIONS

(SUBJECT TO ALTERATION WITHOUT NOTICE)

Model	Cooling capacity	Heating capacity	Condenser fan	Compressor power input max.	Evaporator fan	Air flow supply	Filter size	Current max	Dimensions width x length x height	Mass approx
	kW	kW	kW	kW	kW	m ³ /s	mm	A	mm	kg
TAC 9000	10.3	3	0.57	3	1.1	0.61	495x20x50	20	580 x 830 x 2555	190
TAC 9000H	10.3	3	0.57	3	1.1	0.61	495x620x50	20	580 x 830 x 2555	200
TAC 12000	13.5	3	0.64	3.5	1.3	0.79	495x620x50	22	580 x 830 x 2555	210


Above conditions are based at sea level, ambient 32 ° C, return air 23 ° C db, 16 ° C wb.

COMPONENTS

- Reciprocating compressor.
- Condenser coil with copper tubes with aluminium fins.
- Evaporator coil with copper tubes with aluminium fins.
- Axial condenser fan.
- Centrifugal evaporator fan.
- Heater bank.
- Electrical panel
 - main isolator
 - circuit breaker, and fuses
 - contactors and overloads
 - compressor anti-cycle timer
 - . and LP by pass timer.
- On/off switch.
- Fault/function indication lights (led)
- Cool-heat control thermostat with dead zone.
- Heater safety thermostat.
- Humidity switch.
- Dirty filter switch.
- Air flow switch.
- Low ambient control by variable condenser fan speed.
- Manually adjustable evaporator fan speed.
- All units are assembled, internally wired and charged with refrigerant R22 at the factory.
- Manufactured in South Africa with local after sales service.
- Units are self-contained and compact for easy installation.
- Test run before delivery.
- Frame constructed from aluminium profile. Insulated aluminium covers removable for easy access.
- Textured electrostatic powder coating finish.
- Units are designed for continuous operation at high ambient temperatures.
- By pass air damper.
- Washable air filter.
- Clip-on fixing bolts supplied.

OPTIONS

- Condenser and/or evaporator with epoxy coated fins.
- Condenser and/or evaporator with copper fins.
- Top discharge evaporator fan.

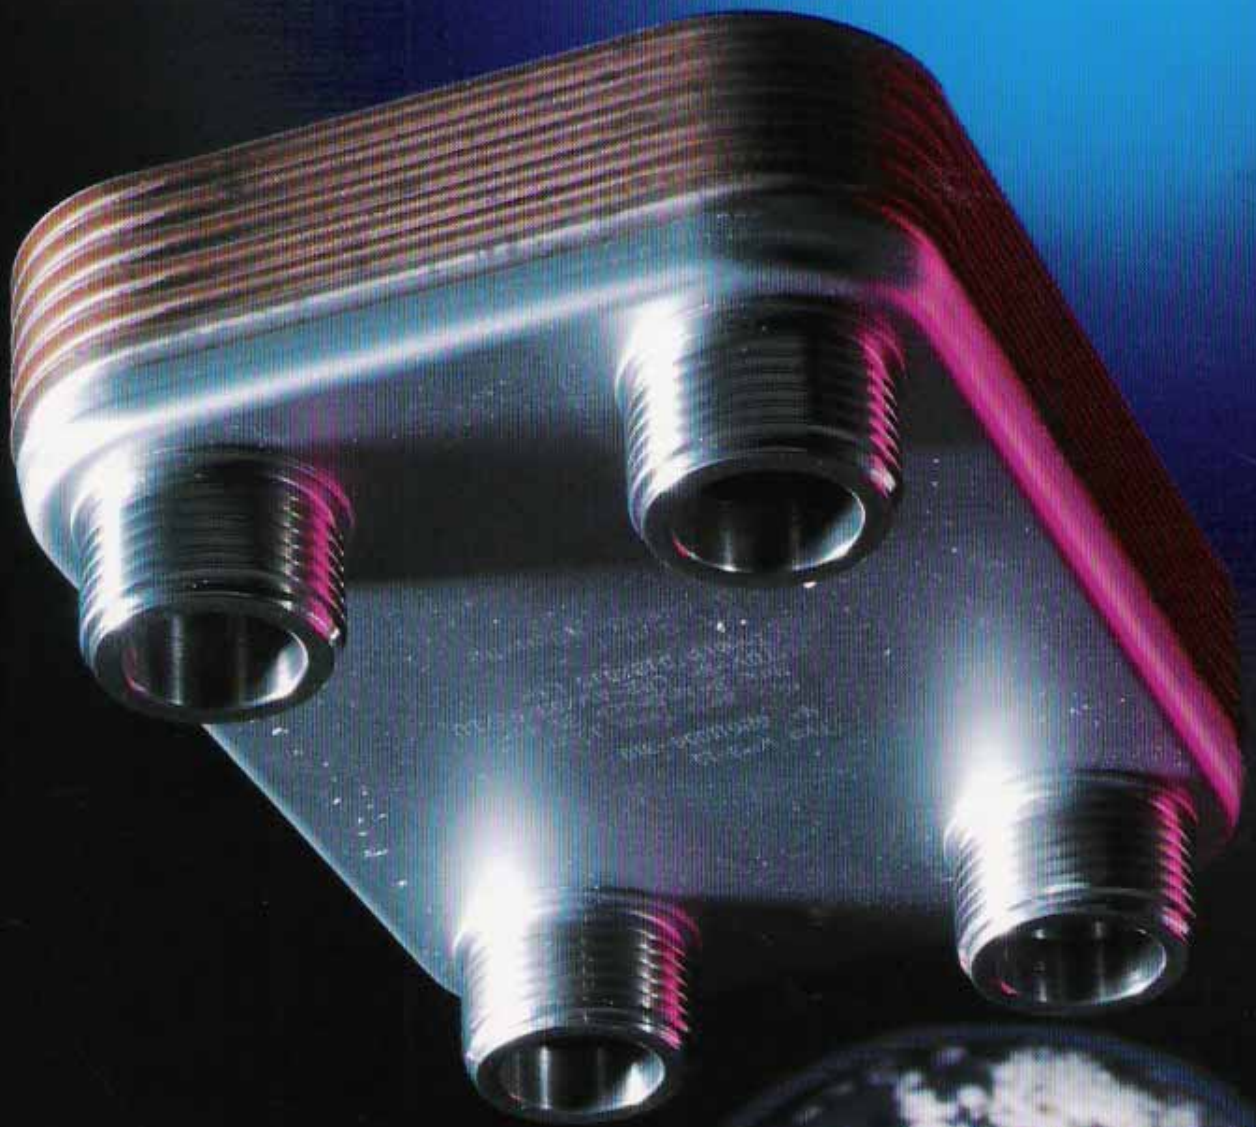

WTT - Wilchwitzer Thermo - Technik

GELÖTETE PLATTENWÄRME- ÜBERTRAGER

Aufbau und Wirkungsweise

Die WTT-Plattenwärmeübertrager bestehen aus einer Anzahl geprägter Edelstahlplatten, die in einem speziellen Lötverfahren miteinander verbunden werden. Beim Zusammenfügen wird jede zweite Platte um 180 Grad in der Ebene gedreht, wodurch sich zwei voneinander getrennte Strömungsräume bilden, in denen die beteiligten Medien im Gegenstrom geführt werden. Die Prägung der Platten verursacht einen hochturbulenten Durchfluß. Dies ermöglicht eine sehr effektive Wärmeübertragung schon bei geringen Volumenströmen.

Einsatzgebiete

Typische Einsatzgebiete für WTT-Plattenwärmeübertrager sind die Haustechnik (Warmwasserbereitung, Fußbodenheizung), Fernwärmeübergabestationen, Verdampfer(AE)/Kondensator in der Kältetechnik, Industriekühlung (Ölkühler).

Auslegung

Durch unser ausgereiftes Computerprogramm gewährleisten wir eine optimale Auslegung für Ihren Anwendungsbereich.

Isolierung & Anschlußverschraubungen

WTT-Plattenwärmeübertrager können komplett mit Isolierung (PU-Hartschaum) und Anschlußverschraubung (wahlweise mit Löt-, Gewinde- oder Schweißensatz) bestellt werden.

Werkstoffe:

Platten: 1.4401 Lot: Kupfer (WP, AE)
 Nickel (NP)

Betriebsbedingungen

max. Betriebsdruck: 40 bar (WP, AE)
 16 bar (NP)
 max. Betriebstemp.: 195° C

Wärmeleistung:

bis 2000 kW

Technische Daten

Technical Data

Caracteristiques techniques

BRAZED PLATE HEAT EXCHANGERS

Construction and operation

WTT brazed plate heat exchangers consist of a pack of refined steel plates which are brazed together in a furnace. When assembling the pack every second plate is turned 180° in the plane. There are two separate flow channels with two mediums in counter current. The design of the plates creates a high turbulence. The results are outstanding heat transfer properties also at small flows. All the components of the exchanger take part in the heat transfer.

Application

Typical applications include: heating, hot-water producing plant, floor heating, compact district heating stations, evaporators (AE)/condensers in heat pumps and liquid chillers, oil-cooler.

Customer support

We will naturally help you optimize a WTT brazed heat exchanger for any of your applications. This work is performed with the assistance of our computer program.

Isolation & connection

WTT brazed plate heat exchanger may be ordered with isolation (PUR or Aeroflex) and fittings (female, external thread or welding connection fittings).

Materials:


Plates: 1.4401 Solder: Copper (WP, AE)
 Nickel (NP)

Performance:

Operating pressure: max. 40 bar (WP, AE)
 16 bar (NP)

Operating temperature: max. 195°C

Capacity per unit: up to 2000 kW

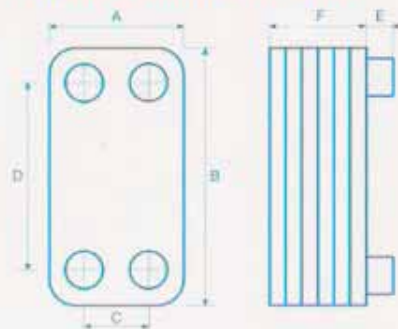

ECHANGEURS THERMIQUES A PLAQUES BRASEES

Conception et Fonctionnement

Les échangeurs thermiques à plaques brasées WTT sont constitués par un empilage de plaques matricées en inox qui sont soudées entre-elles par un procédé spécial de brasage au cuivre. A l'empilage une plaque sur deux est inversée à 180 degrés afin de créer deux zones de circulations séparées dans lesquelles les liquides ou les gaz utilisés circuleront en sens contraires. Le matricage spécial des plaques engendre des flux à hautes turbulences ce qui permet un échange thermique extrêmement performant même dans les cas de faibles courants circulatoires.

Utilisations

Utilisations typiques des échangeurs thermiques WTT à plaques brasées: production d'eau chaude sanitaire, chauffage par le sol, stations de chauffage à distance, condensateurs/évaporateurs (AE) dans la technique du froid, systèmes de refroidissement (radiateurs à huile), divers processus industriels ect.

Definition des échangeurs

Un logiciel performant nous permet de déterminer de façon optimale les caractéristiques de l'échangeur le mieux adapté à vos besoins.

Isolation et raccordements

Les échangeurs thermiques WTT peuvent être livrés complets avec leur isolation soit en mousse de polyuréthane (PU) soit en modèle Aeroflex ainsi qu'avec leurs raccordements soudés ou brasés.

Matériaux:

Plaques en inox: 1.4401,
 brasure au cuivre (WP, AE)
 Nickel (NP)

Performances:

Pression max. d'utilisation: 40 bar (WP, AE)
 16 bar (NP)

Température max. d'utilisation: 195°C

Puissances:

Jusqu'à 2000 kW

Type Type Modèle	A	B	C	D	E	F	Anschluß Connection Raccord	max. Plattenzahl (N) No. of plates max. (N) Nb. de Plaques max. (N)	Volumen/Kanal (Liter) Volume/Channel (litre) Volume/canal(en litres)	Leergewicht (kg) Weight empty(kg) Poids à vide kg
	mm									
WP 1	73	203	40	170	20	7+2,3xN	G 1/2" / ø 22	30	0,02	0,75+0,05xN
NP, WP 2	89	230	43	182	20	7+2,3xN	G 3/4" / ø 22	50	0,03	1,1+0,06xN
NP, WP 22	89	325	43	279	20	7+2,3xN	G 3/4" / ø 22	30	0,04	1,3+0,08xN
NP, WP 3	124	171	73	120	20	7+2,3xN	G 1" / ø 28	50	0,03	1,2+0,06xN
NP, WP 4	124	332	73	281	20	7+2,3xN	G 1" / ø 28	100	0,06	1,6+0,12xN
AE, NP, WP 5	124	529	73	478	20	7+2,3xN	G 1" / ø 35	100	0,095	2,0+0,24xN
AE, WP 7	269	529	200	460	95	7+2,3xN	DN 40 / ø 54	150	0,226	5,5+0,6xN
WP 8	269	529	161	421	62	7+2,4xN	DN 65 / ø 70	150	0,22	7,5+0,7xN
WP 9	269	798	161	690	62	7+2,4xN	DN 65 / ø 70	200	0,399	11,5+0,75xN